

SEETRONIC

Product Data Sheet

产 品 规 格 书

Product Type

产品类型

Power Plug

插头




Product Model

产品型号

SAC7F-SPC

Customer Name

客户名称

Manufacturer 生产方	Prepared 制作	Checked 审核	Approved 核准
	 2016.08.07	 2016.8.17	 2016.8.17

Customer 客户方	Received 接受	Checked 审核	Confirmed 确认

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.
以上规格和信息可能存在公差，并已更新。我们已尽一切努力确保本规格书发布时的正确性。

All Rights Reserved 2023
保留所有权利 2023



sales@seetronic-group.com
www.seetronic.com

Product Data Sheet

Product Type 产品类型	Power Plug 插头	
Product Model 产品型号	SAC7F-SPC	
Product Features 产品特性 ➤ Aluminum alloy housing with lightweight design and superior corrosion resistance ➤ Gold-plated contact surfaces to withstand frequent mating and unmating ➤ Flame retardancy rated UL94 V-0 ➤ Wide operating temperature range; stable long-term power transmission from -30° C to 85° C ➤ 铝合金壳体, 质量轻, 耐腐蚀性能好 ➤ 触点表面镀金, 耐频繁插拔 ➤ 阻燃等级达 UL94 V-0 ➤ 宽温域工作, -30℃~85℃长期稳定输电		



Product Data Sheet

Electrical Parameters

电气参数

Item 项目	Specification 规格
Number of pole 触点数量	6P + 1PE
Rated Current 额定电流	No. 1/2/3/4/6/7 20A, &No. 5 50A UL
Rated Voltage 额定电压	No. 1/2/3/4/6/7: 400VAC ;No. 5: 480VAC UL
Contact Resistance 接触电阻	$\leq 5 \text{ m}\Omega$
Insulation Voltage (at sea level) 绝缘电压	1750V AC (Sea Level)
Insulation Resistance 绝缘电阻	$> 1000\text{M}\Omega$
Attention 注意	No live mating/unmating

Mechanical Parameters

机械参数

Item 项目	Specification 规格
Wire range: 电线尺寸	1/2/3/4/6/7 号单线 12AWG, 5 号单线 8AWG;
Cable OD 电缆外径	$\Phi 10\text{-}20 \text{ mm}$
Type of Terminals 端子接线方式	Solder



Product Data Sheet

Material and Environmental Parameters 材料和环境

Item 项目	Specification 规格
Housing 外壳材质	Al alloy 铝合金
Contacts 触点材质	Cu alloy 铜合金
Contact surface 触点表面	Au 金
Flame retardant rating 阻燃等级	UL94-V0
Temperature range 使用温度范围	-30° C ~ +85° C

Standards and Certifications 标准和认证


Standards 标准	UL1977
Certifications 认证	UL: E359036



Product Data Sheet

Product Drawing

产品外形尺寸

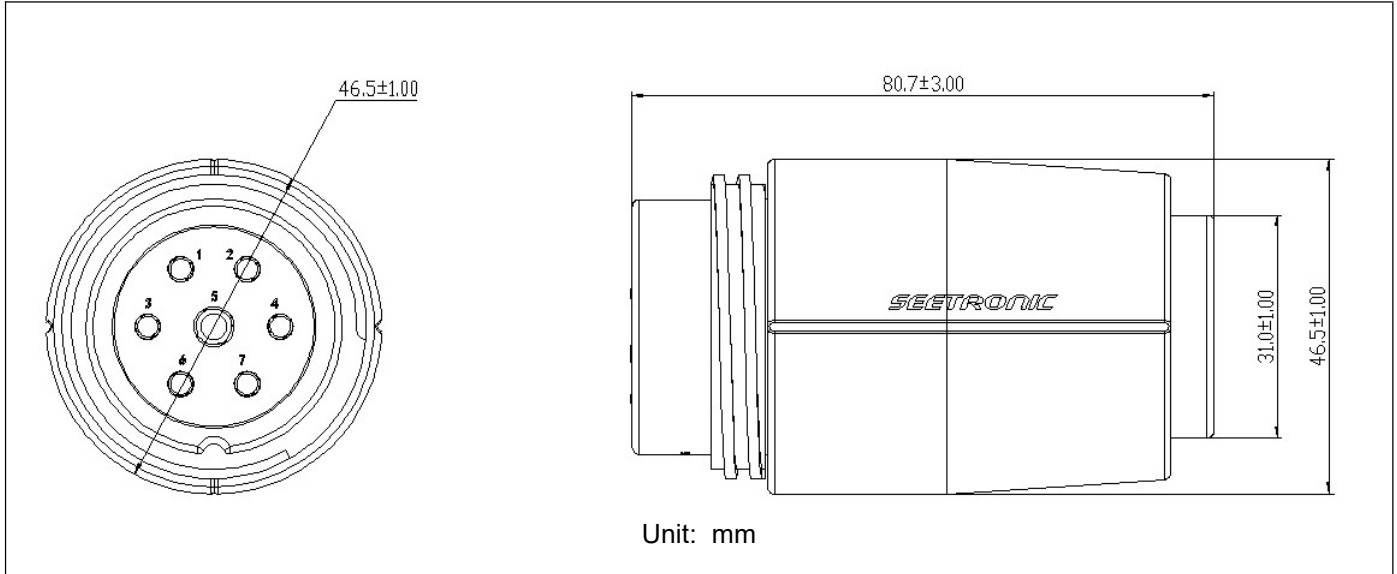

Packaging Method

包装方法

1. Inner Bag 1: 1 piece of 7-pin female connector assembly
2. Inner Bag 2: 1 piece upper 7-pin housing + 1 piece lower 7-pin housing + 1 set plastic cable clamps (2 pieces each for $\Phi 10-12$, $\Phi 13-16$, $\Phi 17-20$ plastic cable clamps)
3. Inner Bag 3: 1 piece metal cable clamp for 7-pin + 4 pieces M4 $\times$ 15 cross recessed screws
4. All above inner bags shall be packed into one large heat-seal bag and heat-sealed.

Packaging Quantity: 10 heat-seal bags per inner carton; 5 inner cartons per export carton

1. 内袋 1: 7 芯母头组件 1PC;
 2. 内袋 2: 7 芯外壳上件 1PC+7 芯外壳下 1PC+7 芯塑料线夹 1 模 ($\Phi 10-12$ 塑料线夹、 $\Phi 13-16$ 塑料线夹、 $\Phi 17-20$ 塑料线夹各 2PCS);
 3. 内袋 3: 7 芯金属线夹 1PC+M4X15 十字螺丝 4PCS;
 4. 以上内袋置于同一大热封袋, 热封封口;
- 包装数量: 10 热封袋/内盒, 5 内盒/一箱。

Accessory

附件


- | | |
|---|--|
| ☐ No accessories
无配件 | ☐ Back fastener plate
安装固定件 |
| ☐ Screws and Nuts
螺丝和螺帽 | ☒ Other (Grounding lug、Ground screw、Washer)
接地连接片, 接地螺钉, 垫片 |



Product Data Sheet

Assembly Instructions 安装使用说明

(1) Strip the cable to the specified dimensions.
(1)按所示尺寸对线缆剥线




(2) Grind off the coating of upper and lower housings at the indicated positions.
(2)按所示位置对上下外壳去涂层打磨

Grind off the coating on the white surfaces of the housing.
按所示位置对上下外壳去涂层打磨



(3) Slide heat shrink tubing over the cable conductor first, then solder it to the insert assembly. After soldering, shift the heat shrink tubing to cover the solder joint and perform heat shrinking.
(3)先将热缩管套入线缆导体上，再与内芯组件焊接在一起，焊接完成后，热缩管推到焊点位置后，热封处理。

PIN 针编号	功能
1	L1
2	L2
3	L3
4	Ground / Chassis Ground
5	Up
6	Common
7	Down

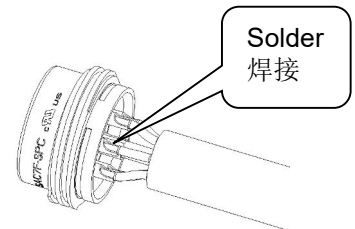

Product Data Sheet

(4) Pre-assemble the cable clamp first, then secure the cable clamp to the wire harness assembly with screws.

(4)先预装线夹，再将线夹与线束组件用螺钉锁定。

Insert the plastic cable clip into the metal cable-clip.

塑料线夹装入金属线夹



Install the plastic cable clip into the lower-housing.

塑料线夹装入下外壳

Place the lower-housing assembly into the clamping groove of the female connector assembly.

下外壳组件放入母头组件卡槽

(5) Fasten the other half of the housing onto the cable bundle assembly via screws.

(5)将另一半外壳用螺钉固定在组束组件上。

Torque wrench
扭力扳手

