



Product Data Sheet

Product Type RJ45 Socket

Product Model SE8FDNH-42


Customer Name _____

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed



Product Data Sheet

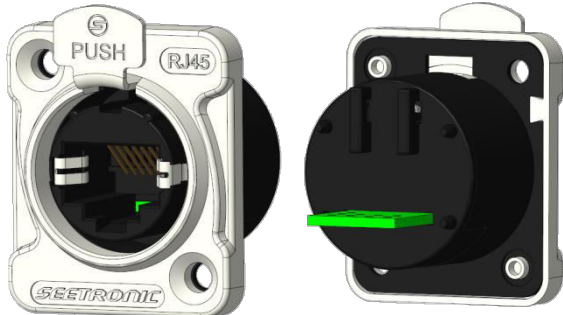Product Type	RJ45 Socket	
Product Model	SE8FDNH-42	
Product Features		
<ul style="list-style-type: none">➤ D-shape panel connector with uniform metal flange and standard D-style installation size➤ Mountable from the front of the panel➤ Complies with Class D according to TIA/EIA568B and ISO/IEC11801 standard➤ The rear end is wire-bonded		



Product Data Sheet

Product Parameters

Item	Specification
Connection type	RJ45
Gender	Female

Electrical Parameters

Item	Specification
Contact resistance	< 10 mΩ
Rated current	0.5A/PIN
Rated voltage	50 V
Insulation resistance	≥ 0.5 GΩ
Dielectric strength	800V DC
Frequency range	1~100 MHz
Transmission performance	Class D



Product Data Sheet

Mechanical Parameters

Item	Specification
Insertion force	$\leq 20\text{ N}$
Service life	> 1000 mating cycles
Locking device	Latch lock

Material and Environmental Parameters

Item	Specification
Contacts	Copper alloy
Insert	PBT
Contact surface	Au
Panel	Zinc alloy
Panel plating	Cr
Flame-retardant grade	UL 94-V0
Temperature range	$-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$


Standards and Certifications

Standards	TIA/EIA 568B, IEC11801
-----------	------------------------



Product Data Sheet

Product Drawing

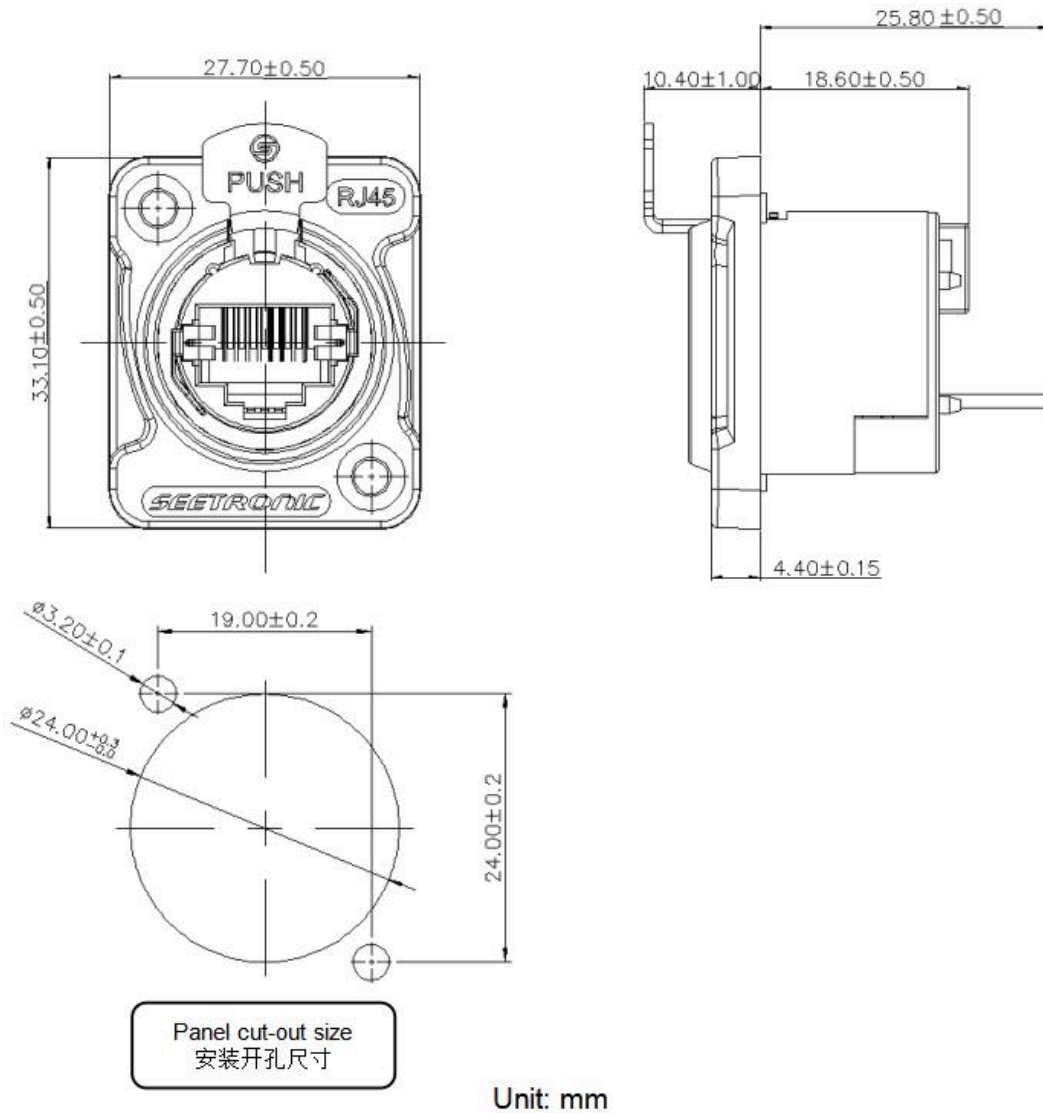

Packaging Method

PE bag packing, 1pc per bag

50pcs per inner carton, 5 inner cartons per master carton (250pcs per master carton)



Product Data Sheet


Accessory

- | | |
|--|--|
| <input type="checkbox"/> No accessories | <input type="checkbox"/> Back fastener plate |
| <input checked="" type="checkbox"/> Screws | <input type="checkbox"/> Waterproof gasket |

Assembly Instructions

- (1) Install the socket in front of the opening of the panel, and tighten the screws clockwise with 0.5 Nm torque

(Note: Panel thickness 1.5~4.0mm)

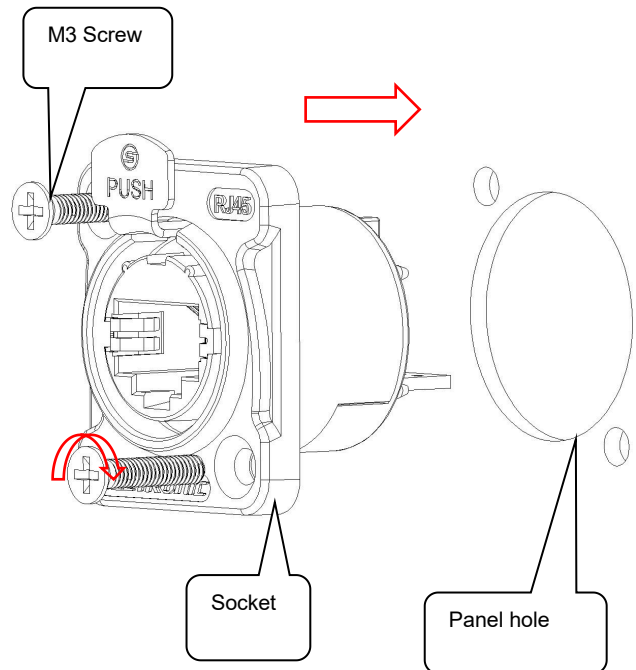

- (2) Wiring diagram

